


SPECIFICATION

MODEL		VUO-024-012M3		
OUTPUT	DC VOLTAGE	12V		
	RATED CURRENT	2A		
	CURRENT RANGE	0-2A		
	RATED POWER	24W		
	RIPPLE&NOISE(max)	< 470mV		
	VOLTAGE TOLERANCE	±0.5V		
INPUT	VOLTAGE RANGE	100-265VAC		
	FREQUENCY RANGE	47-63Hz		
	POWER FACTOR(Typ.)	≥0.5		
	EFFICIENCY(Typ.)	84%		
	AC CURRENT(Typ.)	0.2A/220VAC		
PROTECTION	Short circuit	Protection type:Hicppe mode,recovers automatically after condition is removed		
	Overload	2.5A		
ENVIRONMENT	WORKING TEMP.	-10~+40℃ (Refer to output load derating curve)		
	INGRESS PROTECTION			
	STORAGE TEMP	-40~ +80℃		
SAFETY	SAFETY STANDARDS	EN61347-1;EN61347-2-13;SELV;SAA approved		
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC		
NOTE	1.All parameters NOT specially mentioned are measured at 220VAC input,rated load and 25℃ of ambient temperature. 2.Ripple&noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf&47uf parallel capacitor. 3.Tolerance:includes set up tolerance,line regulation and load regulation.			

Mechanical Specification

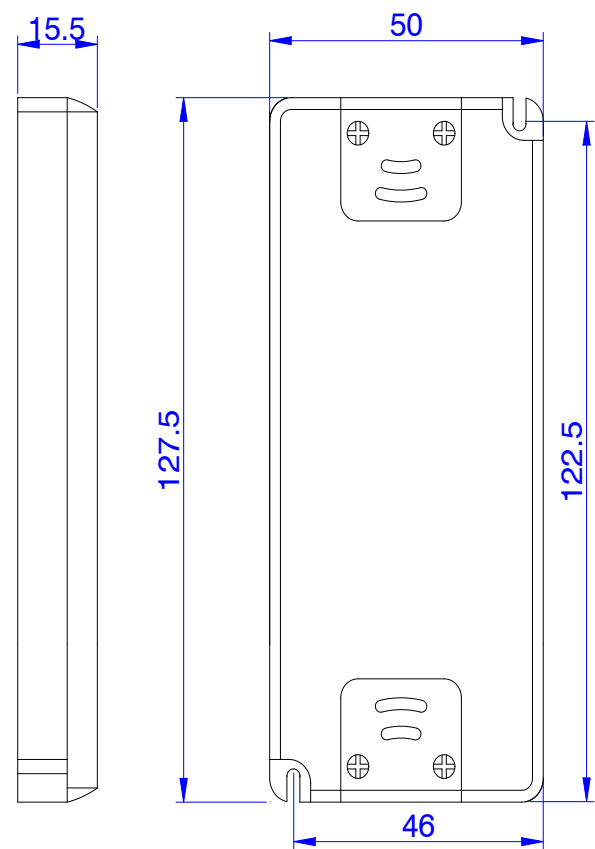

Others

DIMENSION	127.5×50×15.5mm(L×W×H)
CARTON QUANTITY	50pcs/carton
CARTON SIZE	324×214×188mm
WEIGHT	70g/pcs

Derating Curve

