


## SPECIFICATION

MODEL		VUF-036-024M4
OUTPUT	DC VOLTAGE	24V
	RATED CURRENT	1.5A
	CURRENT RANGE	0-1.5A
	RATED POWER	36W
	RIPPLE&NOISE(max)	<360mV
	VOLTAGE TOLERANCE	±0.5V
INPUT	VOLTAGE RANGE	100-265VAC
	FREQUENCY RANGE	47-63Hz
	POWER FACTOR(Typ.)	≥0.55
	EFFICIENCY(Typ.)	0.85
	AC CURRENT(Typ.)	0.22A/220VAC
PROTECTION	Short circuit	Protection type:Hicpe mode,recovers automatically after condition is removed
	Overload	2.6A
ENVIRONMENT	WORKING TEMP.	-10~+40°C (Refer to output load derating curve)
	STORAGE TEMP	-40~+80°C
SAFETY	SAFETY STANDARDS	EN61347-1;EN61347-2-13;SELV approved
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC
NOTE	<p>1.All parameters NOT specially mentioned are measured at 220VAC input,rated load and 25°C of ambient temperature.</p> <p>2.Ripple&amp;noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf&amp;47uf parallel capacitor.</p> <p>3.Tolerance:includes set up tolerance,line regulation and load regulation.</p>	

## Mechanical Specification

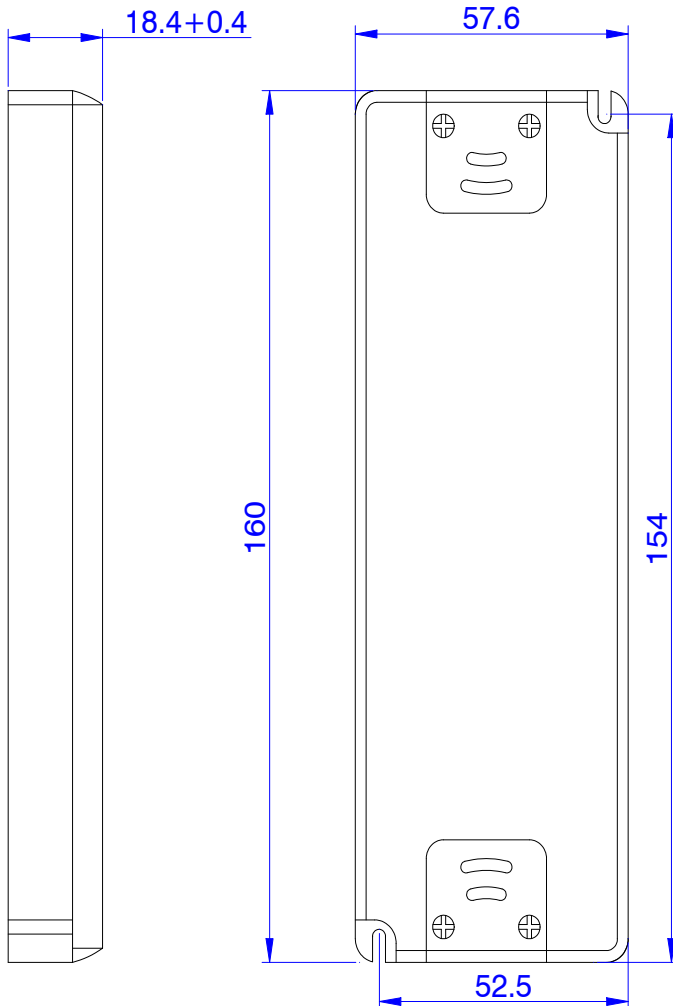

## Others

DIMENSION	160×57.6×18.4mm(L×W×H)
CARTON QUANTITY	pcs/carton
CARTON SIZE	× × mm
WEIGHT	0.14Kg/pcs

## Derating Curve

